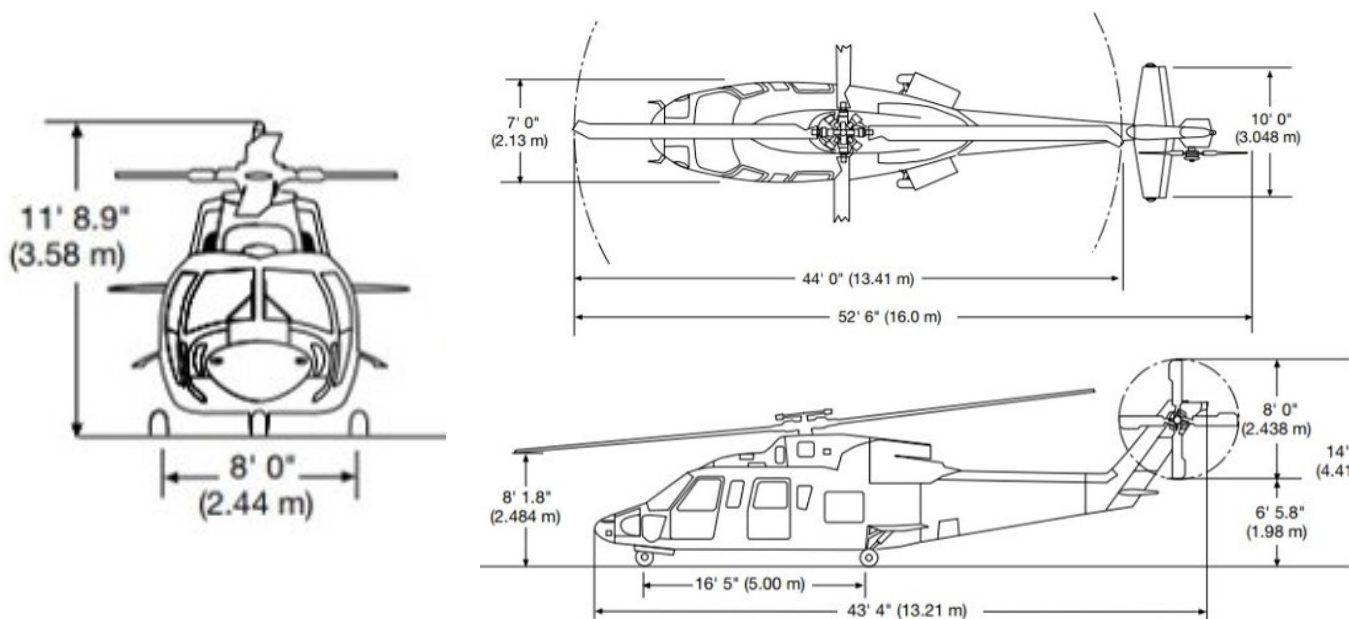


**POWERPLANT**

Manufacturer	Sikorsky Aircraft Corporation
Engines	2 × Turbomecca Arriel 2S2
Max. power per engine	2 × 1.032 hp

SPECIFICATIONS

Seats	1–2 Crew and up to 12 Passengers
Cruising speed	145 kts
Max. speed VNE	155 kts
Fuel consumption	400 ltr/hr
Max. fuel load	1.064 ltr
Max. operating altitude	15.000 ft (Density altitude)
Endurance	2:10 hrs (incl. 30 min reserve)
Max. take-off weight	11.700 lbs/5.307 kg

LOADING INFORMATION

Empty weight	7.860 lbs/3.565 kg
Theoretical useful load	3.840 lbs/1.741 (fuel, equipment, crew and payload)
Max. external load	3.300 lbs/1.497 kg

AVIONICS

- 2 × VHF COM
- Standby Flight Instruments
- 2 × VHF NAV/DME
- Integrated Instrument Display System (IIDS)
- GARMIN GPS 500 W
- ELT and ADELTA
- ADF
- Enhanced Ground Proximity Warning System (EGPWS)
- Dual AHRS
- Digital Weather Radar
- Dual EFIS
- Radar Altimeter

EQUIPMENT

- 12/10/8 or VIP 6 Seat Configurations
- Air Condition
- Quiet Transmission
- Passenger Briefing System
- Single/Dual Pilot IFR/VFR
- Full 4 Axis Dual Digital Autopilot System
- Health and Usage Monitoring System (HUMS)
- Floation System incl. automatic deployment
- Integrated life rafts
- Cockpit Voice and Data Recorder System
- Movable Search and Landing light
- Fixed landing light
- High Intensity Strobe Lights System
- Helicopter Emergency Egress Lighting System
- Engine fire extinguishing system
- Engine Barrier Filter System
- Cargo Hook (optional)
- Auxiliary Fuel Tank (optional)

